

Type : 4EG280M4E-PA-BA-000

Date : 01.01.2023

Power [kW]	: 90.0
Input Voltage [V]	: 400
Connection Type [Δ / Y]	: Δ
Frequency [Hz]	: 50
Pole Number	: 4
Nominal Speed [rpm]	: 1488
Nominal Current [A]	: 152
Nominal Moment [Nm]	: 578
Nominal Efficiency [η]	: 96.1
Power Factor [cosφ]	: 0.89
Locked Rotor Current [Ia/In]	: 7.6
Locked Rotor Torque [Ma/Mn]	: 3.1
Breakdown Torque [Mk/Mn]	: 3.2
Motor Color	: RAL 7031
Ambient Temperature	: -15°C / +40°C

Efficiency Class	: IE4
Duty Cycle	: S1
Service Factor	: 1.25
Frame Size	: 280M
Weight [kg]	: 720
Insulation Class	: F [155°C]
Temperature Rise	: B [80°K]
Protection Class	: IP55
Vibration Severity Grade	: A
Method of Cooling	: IC411 (TEFC)
Direction of Rotation	: Bidirectional
Balance	: Half Key
Motor Thermal Protection	: PTC
Altitude Above Sea Level	: 1000m
Sound Pressure Level [dBA]	: 71

ELECTRICAL DATA

Δ / Y	U [V]	f [Hz]	P [kW]	n [rpm]	I [A]	η [%100]	η [%75]	η [%50]	Cosφ	Cl
Δ	400	50	90.0	1488	152	96.1	96.3	96.3	0.89	IE4
Y	690	50	90.0	1488	87.8	96.1	96.3	96.3	0.89	IE4
Δ	460	60	90.0	1782	132	96.2	96.3	95.6	0.89	IE4
Δ	460	60	104	1780	151	96.2	96.4	96.4	0.90	IE4


MECHANICAL DATA

Moment of Inertia [kgm ²]	: 1.95000
Bearing [DS / NS]	: 6317 / 6317
Frame Material	: Cast Iron
Flange Type / Material	: B5 / Cast Iron
Cooling Fan Material	: Plastic
End Shield Material	: Cast Iron
Lubrication of Bearings [DS / NS]	: 6600h-38gr / 7800h-38gr MOBIL Polyrex EM

TERMINAL BOX

Terminal Box Material	: Cast Iron
Terminal Box Position	: Top
Terminal Box Cable Entry	: 2xM63x1.5
Terminal Box Blind Cap	: --
Contact Screw Thread	: M10

MECHANICAL DIMENSIONS

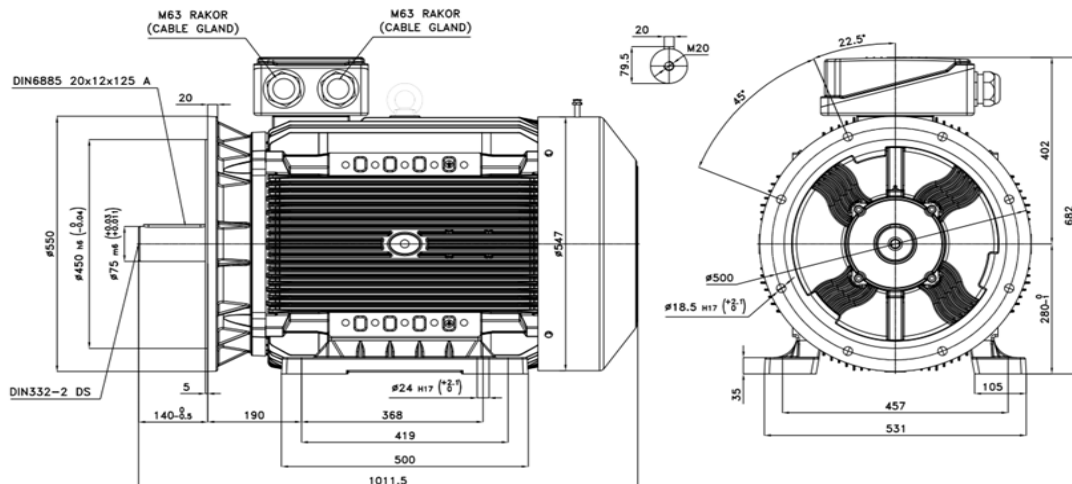



ELK MOTOR SAN. ve TİC. A.Ş.
www.elkmotor.com.tr
+90 (282) 726 92 94

TECHNICAL DATASHEET ACCORDING TO COMMISSION REGULATION (EU) 2019/1781 THREE PHASE INDUCTION MOTOR - SQUIRREL CAGE

Type : 4EG280M4E-PA-BA-000

Date : 01.01.2023


NAMEPLATE DATA

Power [kW]	: 90.0	Nominal Speed [rpm]	: 1488
Nominal Voltage [V]	: 400	Nominal Current [A]	: 152
Connection Type [Δ / Y]	: Δ	Nominal Moment [Nm]	: 578
Nominal Frequency [Hz]	: 50	Nominal Efficiency [η %]	: 96.1

THE POWER LOSSES AT SEVEN OPERATING POINTS ACCORDING TO COMMISSION REGULATION (EU) 2019/1781

Operating Point Number	Speed n/n_N [%]	Torque T/T_N [%]	Relative Power Losses P_L/P_N [%]	Efficiency η [%]
P ₁	90	100	0.0	0.0
P ₂	50	100	0.0	0.0
P ₃	25	100	0.0	0.0
P ₄	90	50	0.0	0.0
P ₅	50	50	0.0	0.0
P ₆	50	25	0.0	0.0
P ₇	25	25	0.0	0.0

MAP OF RELATIVE POWER LOSSES P_L/P_N [%]

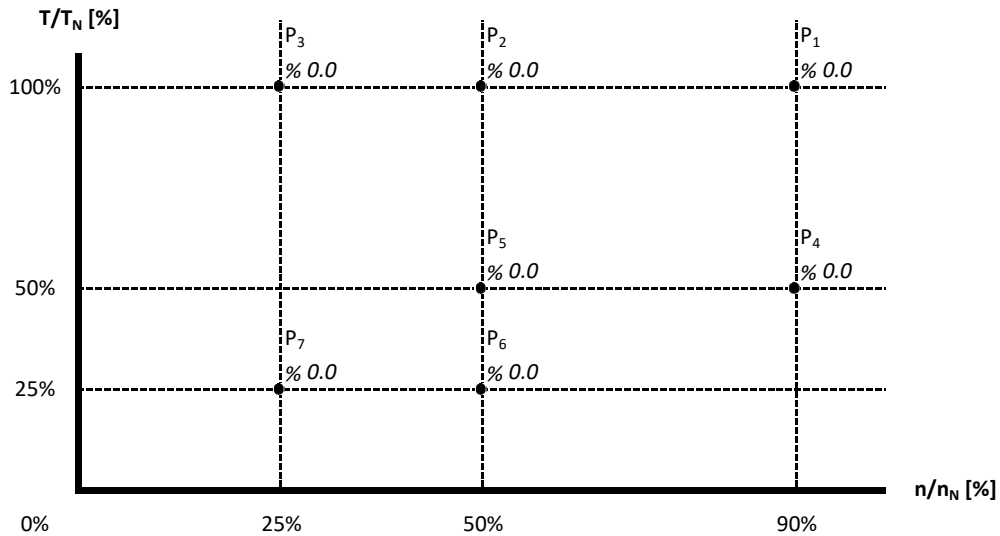

Manufactured and tested in accordance with IEC 60034


FR.AG.010 REV.NO: 04 REV.DATE: 01.01.2023

*Technical data are subject to change! There may be discrepancies between calculated and rating plate values.

*ELK Motor has right to change all the data without prior notice.

Motor Code : 4EG280M4E-PA-BA-000

Torque and Current Curves Related to Speed

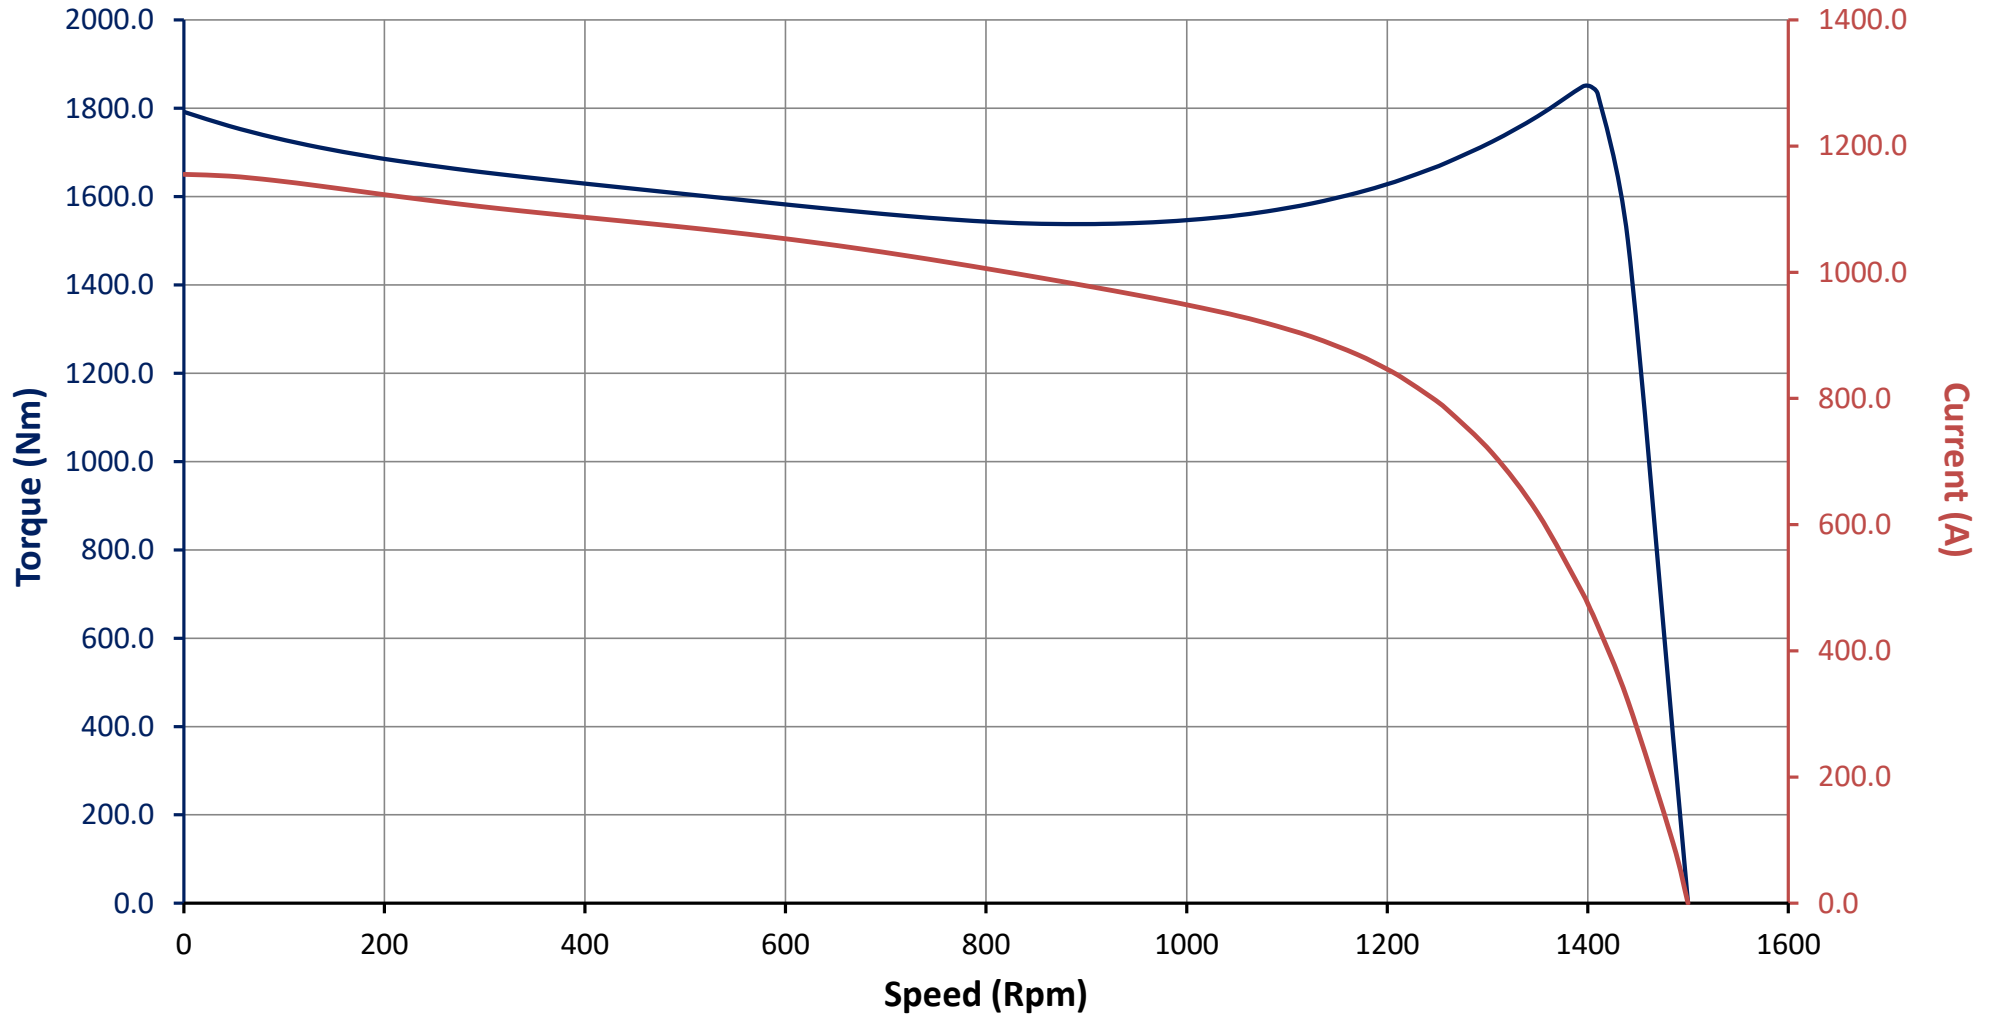

Motor Code : 4EG280M4E-PA-BA-000

Performance Curves Related to Rated Output

