

Type : 2EL080M4B-PC-A0-000**Date** : 01.01.2023

Power [kW]	: 0.55	Efficiency Class	: IE2
Input Voltage [V]	: 400	Duty Cycle	: S1
Connection Type [Δ / Y]	: Y	Service Factor	: 1.15
Frequency [Hz]	: 50	Frame Size	: 080M
Pole Number	: 4	Weight [kg]	: 9.70
Nominal Speed [rpm]	: 1440	Insulation Class	: F [155°C]
Nominal Current [A]	: 1.45	Temperature Rise	: B [80°C]
Nominal Moment [Nm]	: 3.65	Protection Class	: IP55
Nominal Efficiency [η]	: 77.1	Vibration Severity Grade	: A
Power Factor [$\cos\phi$]	: 0.71	Method of Cooling	: IC411 (TEFC)
Locked Rotor Current [I_a/I_n]	: 5.2	Direction of Rotation	: Bidirectional
Locked Rotor Torque [M_a/M_n]	: 2.0	Balance	: Half Key
Breakdown Torque [M_k/M_n]	: 3.0	Motor Thermal Protection	: --
Motor Color	: RAL 7031	Altitude Above Sea Level	: 1000m
Ambient Temperature	: -15°C / +40°C	Sound Pressure Level [dBA]	: 50

ELECTRICAL DATA


Δ / Y	U [V]	f [Hz]	P [kW]	n [rpm]	I [A]	η [%100]	η [%75]	η [%50]	Cos ϕ	Cl
Δ	230	50	0.55	1440	2.51	77.1	76.7	75.0	0.71	IE2
Y	400	50	0.55	1440	1.45	77.1	76.7	75.0	0.71	IE2
Y	460	60	0.55	1745	1.29	78.5	77.4	75.2	0.68	IE2
Y	460	60	0.64	1735	1.40	79.6	78.5	76.0	0.72	IE2

MECHANICAL DATA

Moment of Inertia [kgm ²]	: 0.00175
Bearing [DS / NS]	: 6204ZZ / 6204ZZ
Frame Material	: Aluminum
Flange Type / Material	: B14 / Aluminum
Cooling Fan Material	: Plastic
End Shield Material	: Aluminum

TERMINAL BOX

Terminal Box Material	: Aluminum
Terminal Box Position	: Top
Terminal Box Cable Entry	: M20x1.5
Terminal Box Blind Cap	: M16x1.5
Contact Screw Thread	: M4

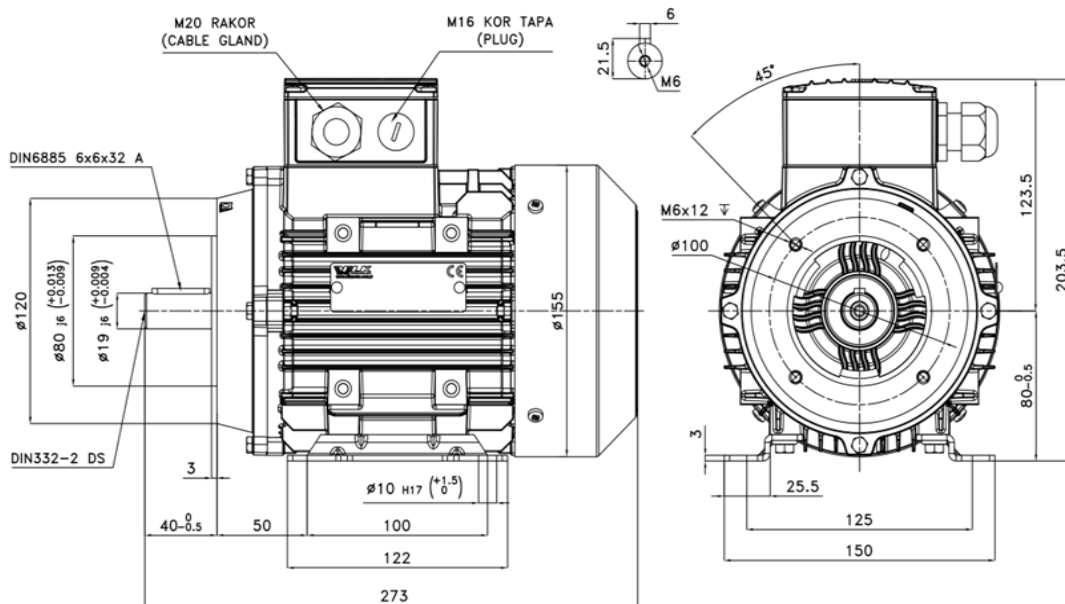MECHANICAL DIMENSIONS

Manufactured and tested in accordance with IEC 60034

*Technical data are subject to change! There may be discrepancies between calculated and rating plate values.

*ELK Motor has right to change all the data without prior notice.

FR.AG.010 REV.NO: 04 REV.DATE: 01.01.2023



ELK MOTOR SAN. ve TİC. A.Ş.
www.elkmotor.com.tr
+90 (282) 726 92 94

TECHNICAL DATASHEET ACCORDING TO COMMISSION REGULATION (EU) 2019/1781 THREE PHASE INDUCTION MOTOR - SQUIRREL CAGE

Type : 2EL080M4B-PC-A0-000

Date : 01.01.2023


NAMEPLATE DATA

Power [kW]	: 0.55	Nominal Speed [rpm]	: 1440
Nominal Voltage [V]	: 400	Nominal Current [A]	: 1.45
Connection Type [Δ / Y]	: Y	Nominal Moment [Nm]	: 3.65
Nominal Frequency [Hz]	: 50	Nominal Efficiency [η %]	: 77.1

THE POWER LOSSES AT SEVEN OPERATING POINTS ACCORDING TO COMMISSION REGULATION (EU) 2019/1781

Operating Point Number	Speed n/n_N [%]	Torque T/T_N [%]	Relative Power Losses P_L/P_N [%]	Efficiency η [%]
P ₁	90	100	30.7	74.6
P ₂	50	100	23.8	67.7
P ₃	25	100	25.1	49.9
P ₄	90	50	25.4	63.9
P ₅	50	50	13.6	64.9
P ₆	50	25	14.5	46.4
P ₇	25	25	7.9	43.8

MAP OF RELATIVE POWER LOSSES P_L/P_N [%]

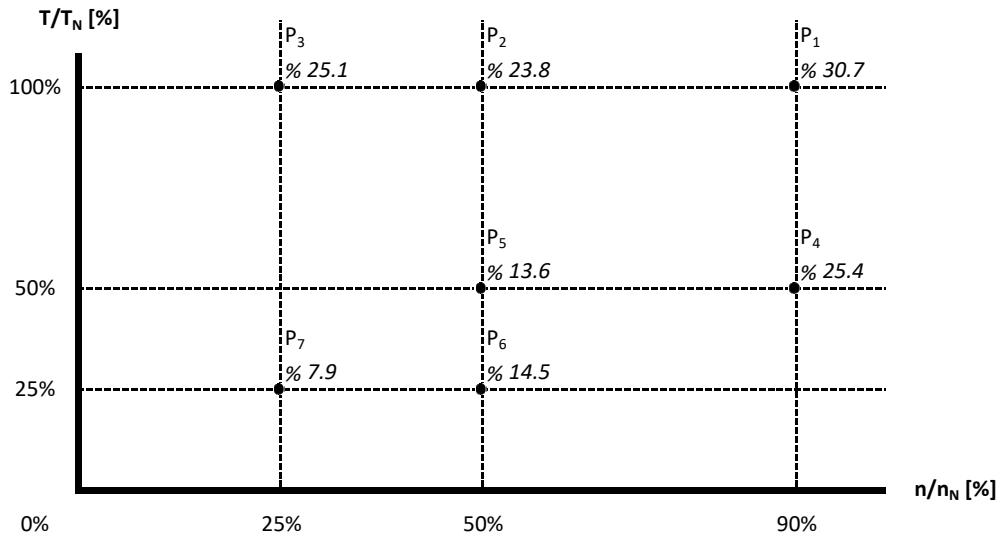

Manufactured and tested in accordance with IEC 60034


FR.AG.010 REV.NO: 04 REV.DATE: 01.01.2023

*Technical data are subject to change! There may be discrepancies between calculated and rating plate values.

*ELK Motor has right to change all the data without prior notice.

Motor Code : 2EL080M4B-PC-A0-000

Torque and Current Curves Related to Speed

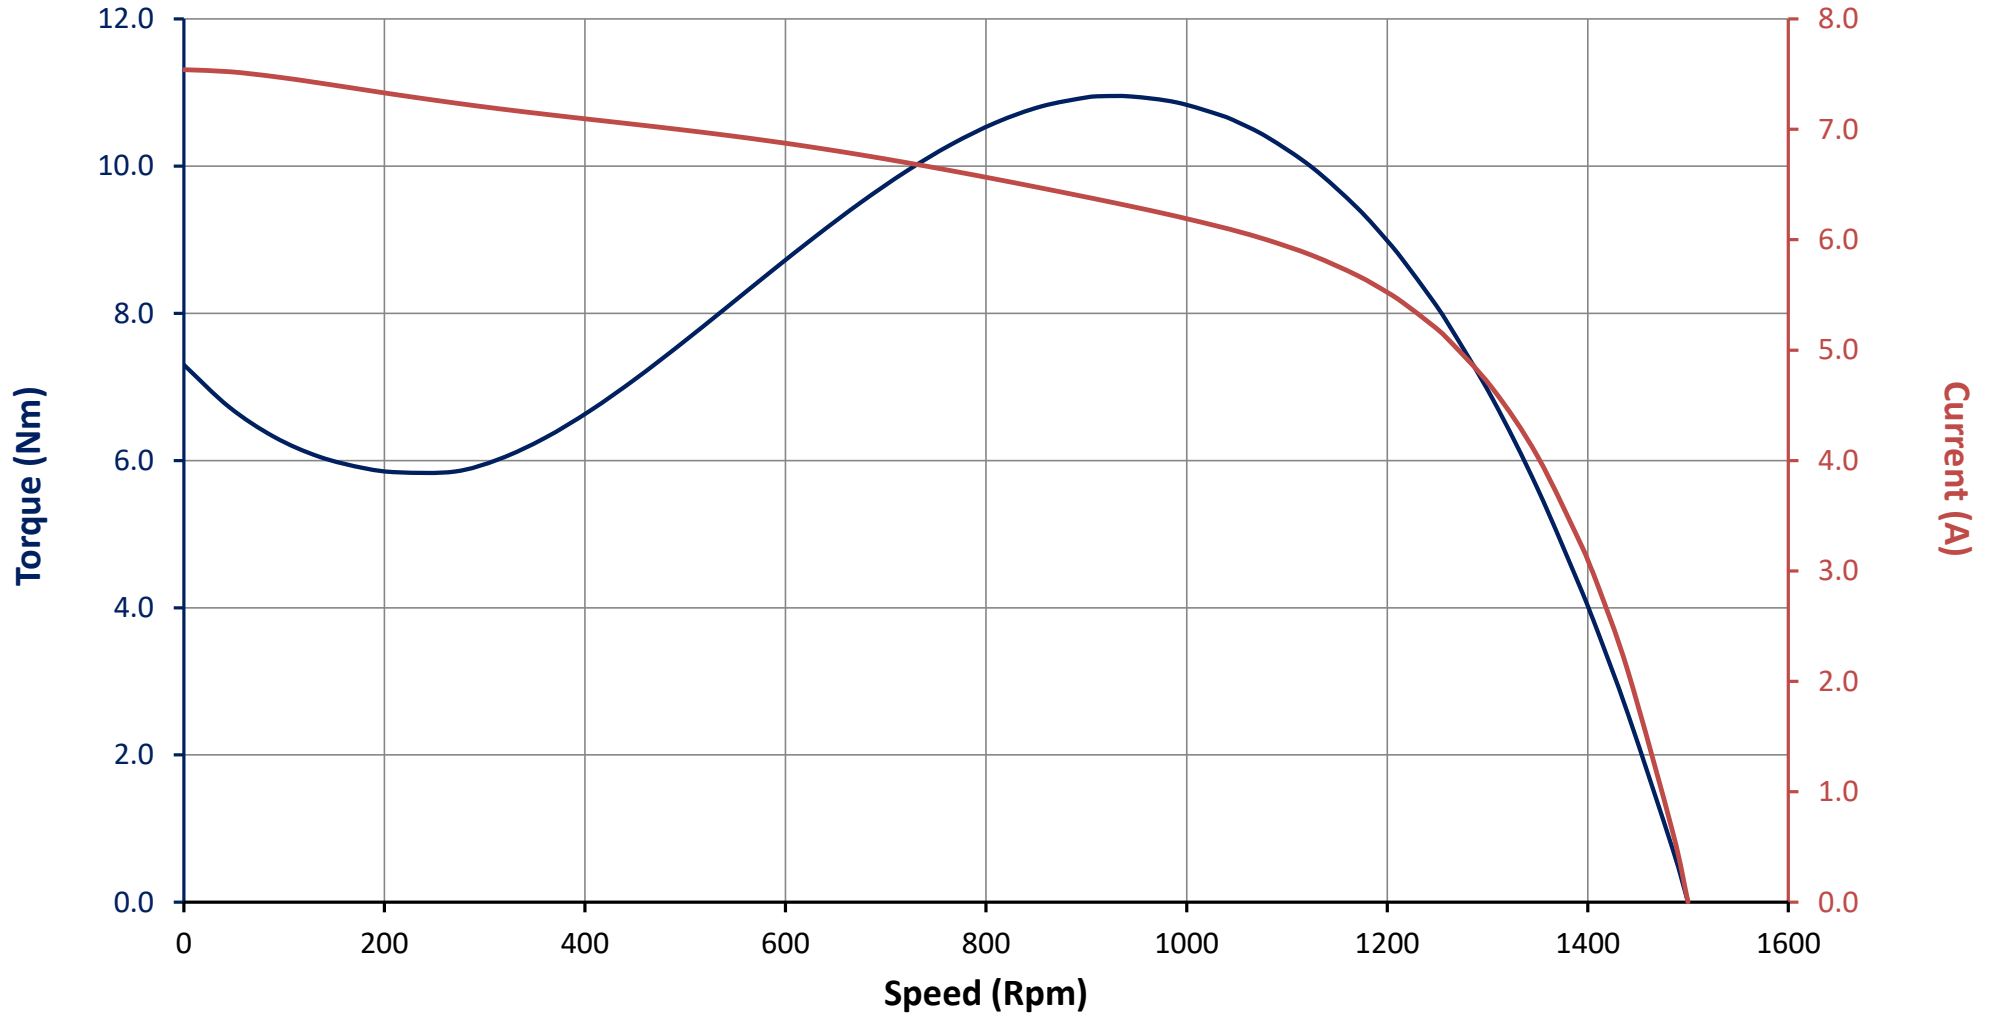

Motor Code : 2EL080M4B-PC-A0-000

Performance Curves Related to Rated Output

