

Type : 4EL200L2C-PD-BA-000

Date : 01.01.2023

Power [kW]	: 30.0	Efficiency Class	: IE4
Input Voltage [V]	: 400	Duty Cycle	: S1
Connection Type [Δ / Y]	: Δ	Service Factor	: 1.25
Frequency [Hz]	: 50	Frame Size	: 200L
Pole Number	: 2	Weight [kg]	: 215
Nominal Speed [rpm]	: 2970	Insulation Class	: F [155°C]
Nominal Current [A]	: 51.0	Temperature Rise	: B [80°K]
Nominal Moment [Nm]	: 96.5	Protection Class	: IP55
Nominal Efficiency [η]	: 94.5	Vibration Severity Grade	: A
Power Factor [$\cos\phi$]	: 0.90	Method of Cooling	: IC411 (TEFC)
Locked Rotor Current [I_a/I_n]	: 8.3	Direction of Rotation	: Bidirectional
Locked Rotor Torque [M_a/M_n]	: 3.2	Balance	: Half Key
Breakdown Torque [M_k/M_n]	: 3.7	Motor Thermal Protection	: PTC
Motor Color	: RAL 7031	Altitude Above Sea Level	: 1000m
Ambient Temperature	: -15°C / +40°C	Sound Pressure Level [dBA]	: 74

ELECTRICAL DATA

Δ / Y	U [V]	f [Hz]	P [kW]	n [rpm]	I [A]	η [%100]	η [%75]	η [%50]	Cos ϕ	Cl
Δ	400	50	30.0	2970	51.0	94.5	94.7	94.0	0.90	IE4
Y	690	50	30.0	2970	29.4	94.5	94.7	94.0	0.90	IE4
Δ	460	60	30.0	3565	45.2	93.6	93.4	92.6	0.89	IE4
Δ	460	60	34.8	3560	51.0	94.1	94.3	93.6	0.91	IE4


MECHANICAL DATA

Moment of Inertia [kgm ²]	: 0.17500
Bearing [DS / NS]	: 6312ZZ / 6212ZZ
Frame Material	: Aluminum
Flange Type / Material	: B3 / Aluminum
Cooling Fan Material	: Plastic
End Shield Material	: Aluminum

TERMINAL BOX

Terminal Box Material	: Aluminum
Terminal Box Position	: Top
Terminal Box Cable Entry	: M12x1.5+2xM40x1.5
Terminal Box Blind Cap	: --
Contact Screw Thread	: M6

MECHANICAL DIMENSIONS

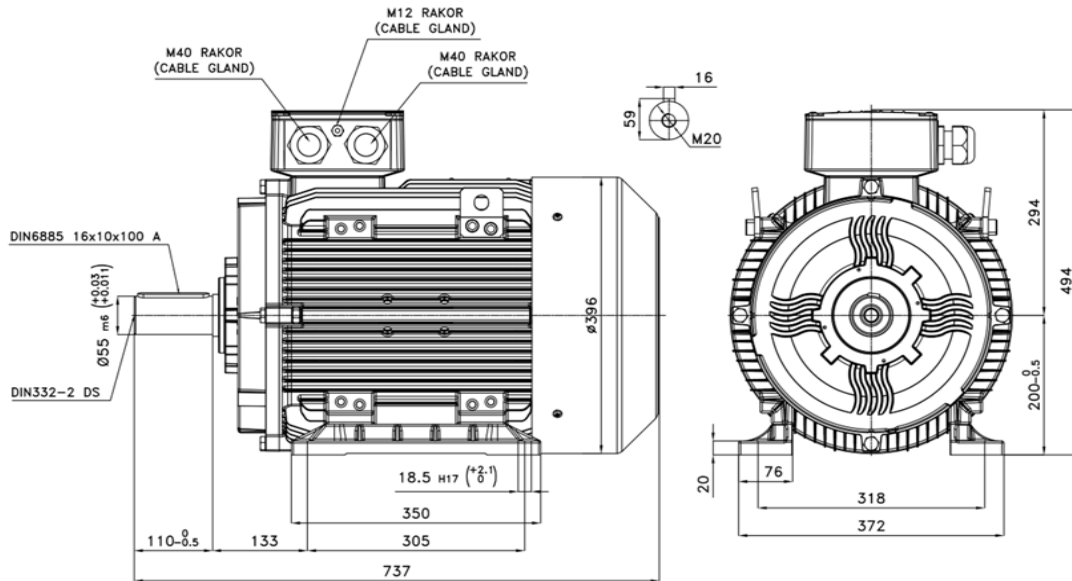

Manufactured and tested in accordance with IEC 60034

*Technical data are subject to change! There may be discrepancies between calculated and rating plate values.

*ELK Motor has right to change all the data without prior notice.

FR.AG.010 REV.NO: 04 REV.DATE: 01.01.2023



ELK MOTOR SAN. ve TİC. A.Ş.
www.elkmotor.com.tr
+90 (282) 726 92 94

TECHNICAL DATASHEET ACCORDING TO COMMISSION REGULATION (EU) 2019/1781 THREE PHASE INDUCTION MOTOR - SQUIRREL CAGE

Type : 4EL200L2C-PD-BA-000

Date : 01.01.2023


NAMEPLATE DATA

Power [kW]	: 30.0	Nominal Speed [rpm]	: 2970
Nominal Voltage [V]	: 400	Nominal Current [A]	: 51.0
Connection Type [Δ / Y]	: Δ	Nominal Moment [Nm]	: 96.5
Nominal Frequency [Hz]	: 50	Nominal Efficiency [η %]	: 94.5

THE POWER LOSSES AT SEVEN OPERATING POINTS ACCORDING TO COMMISSION REGULATION (EU) 2019/1781

Operating Point Number	Speed n/n_N [%]	Torque T/T_N [%]	Relative Power Losses P_L/P_N [%]	Efficiency η [%]
P ₁	90	100	5.9	93.9
P ₂	50	100	3.9	92.7
P ₃	25	100	3.2	88.8
P ₄	90	50	4.1	91.7
P ₅	50	50	2.1	92.2
P ₆	50	25	1.6	88.6
P ₇	25	25	0.8	88.7

MAP OF RELATIVE POWER LOSSES P_L/P_N [%]

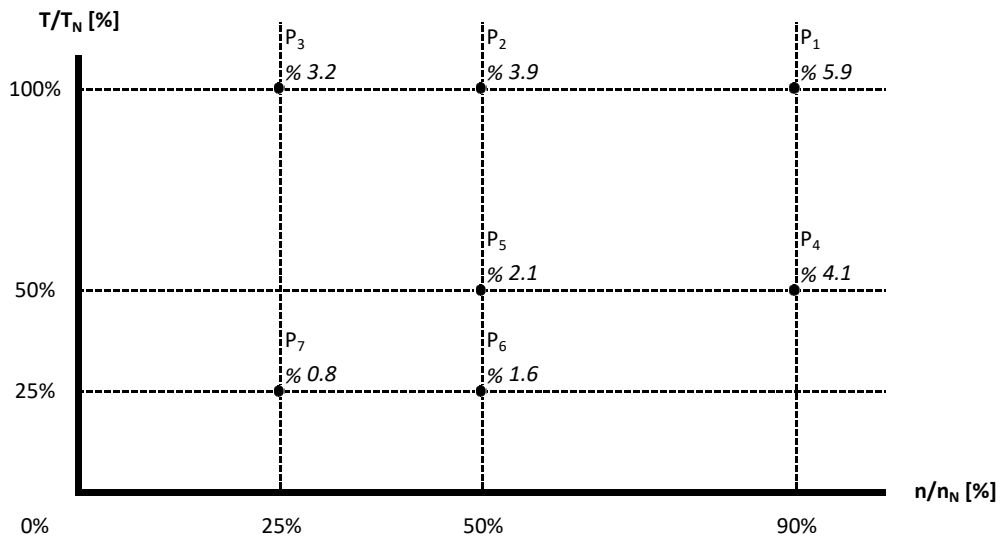

Manufactured and tested in accordance with IEC 60034


FR.AG.010 REV.NO: 04 REV.DATE: 01.01.2023

*Technical data are subject to change! There may be discrepancies between calculated and rating plate values.

*ELK Motor has right to change all the data without prior notice.

Motor Code : 4EL200L2C-PD-BA-000

Torque and Current Curves Related to Speed

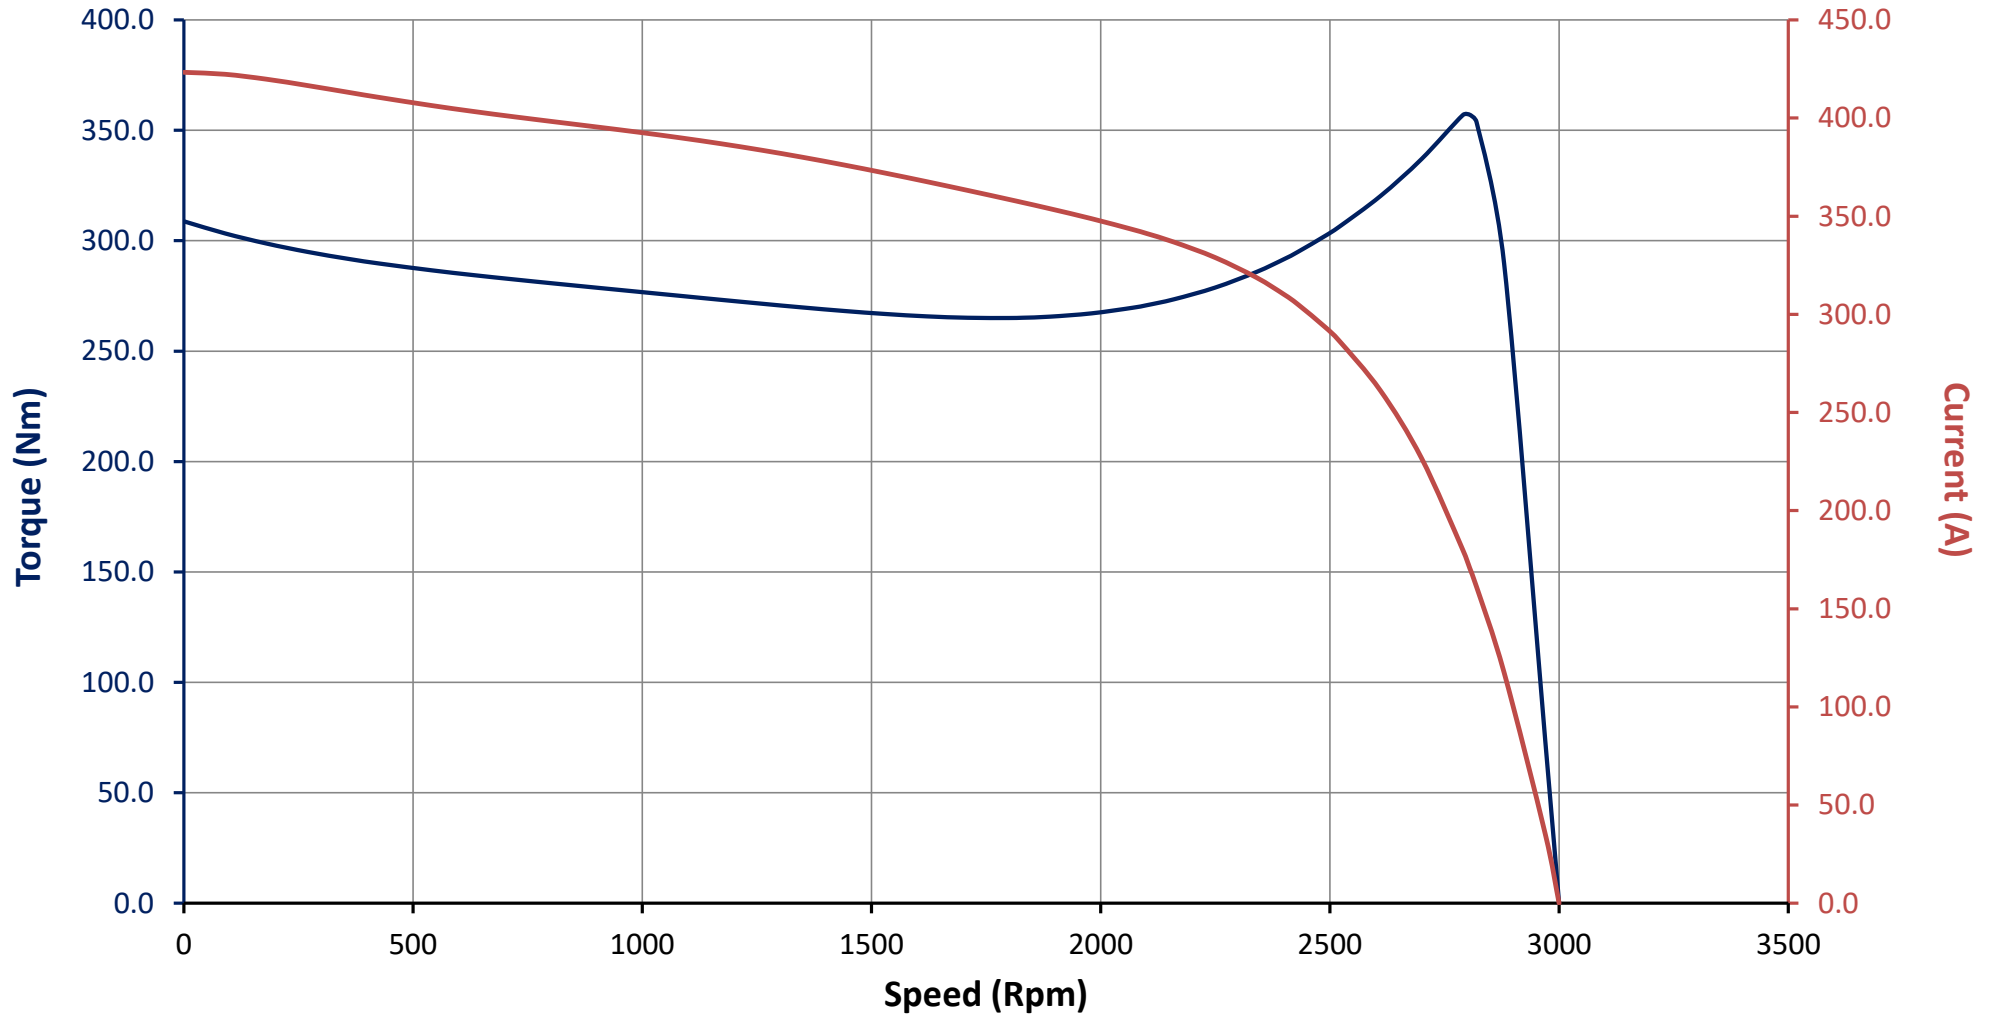

Motor Code : 4EL200L2C-PD-BA-000

Performance Curves Related to Rated Output

